



Cat[®] Bale Grabs

Skid Steer Loader
Multi Terrain Loader
Compact Track Loader
Compact Wheel Loader

Cat[®] Bale Grabs are used for grasping, carrying, and placing of baled material. Rigid and built for a long working life, the Bale Grab provides the ability to move and stack bales without damaging wrapping or the bale itself.

Features:

Large capacity

- The large opening of the Cat Bale Grab opens wide enough to grasp 1803 mm (71 in) or 2133 mm (84 in) bales.

Tubular arms

- The Bale Grab features tubular constructed arms which eliminate damage to wrapped bales.

Rigid frame

- High strength steel frame ensures the durability of the Cat Bale Grab. Hardened pins and easily accessed grease points leads to extended life and productivity.

Bolt-on step

- Serrated step allows safe and ergonomic access to machine cab that is easily replaceable if damaged.

SSL quick coupler

- Rugged, opposing edge design holds the work tool securely and allows the operator to quickly change from one high performance Cat Work Tool to another.

Cat XT[™]-3 ES hosing

- Cat XT-3 ES hose, couplings, and O-ring face seals provide superior, leak-free performance and reliability. Hydraulic quick disconnects enable fast tool changes.



Compatibility

Model	Machine Compatibility
1803 mm (71 in)	216B3, 226D, 232D, 236D, 239D, 242D, 246D, 249D, 257D, 259D, 262D, 272D2, 272D2 XHP, 277D, 279D, 287D, 289D, 297D2, 297D2 XHP, 299D2, 299D2 XHP, 903C2, 906K, 907K, 908K, 906M, 907M, 908M
2133 mm (84 in)	226D, 232D, 236D, 239D, 242D, 246D, 249D, 257D, 259D, 262D, 272D2, 272D2 XHP, 277D, 279D, 287D, 289D, 297D2, 297D2 XHP, 299D2, 299D2 XHP, 903C2, 906K, 907K, 908K, 906M, 907M, 908M

Machine model availability and attachment vary by region. Please contact your local dealer for availability.



Specifications

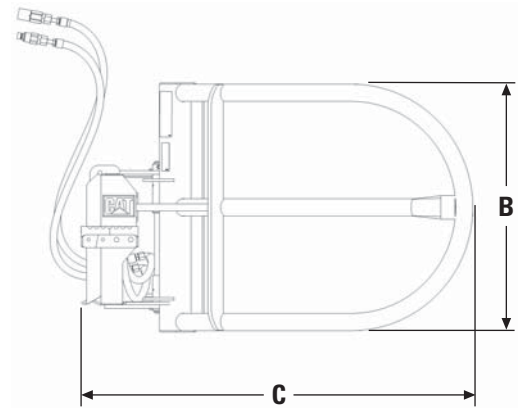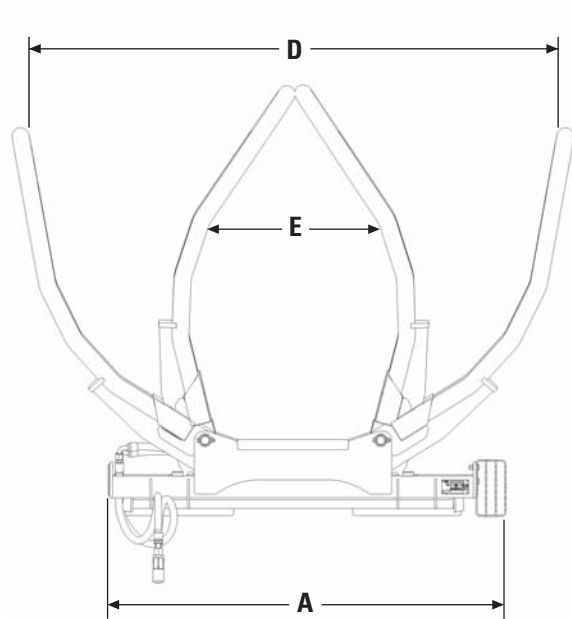

			1803 mm (71 in)		2133 mm (84 in)	
A Overall width	mm	(in)	1401	(55)	1401	(55)
B Overall height	mm	(in)	873	(34)	873	(34)
C Overall depth	mm	(in)	1550	(61)	1631	(63)
D Maximum opening width	mm	(in)	1803	(71)	2133	(84)
E Internal width with closed arms	mm	(in)	940	(37)	918	(36)
Weight	kg	(lb)	261	(575)	263	(580)
Capacity	kg	(lb)	1091	(2,400)	1091	(2,400)
Working pressure	kpa	(psi)	21 000	(3,000)	21 000	(3,000)

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

AEHQ7809 (05-2016)

© 2016 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, SAFETY.CAT.COM, their respective logos, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

